
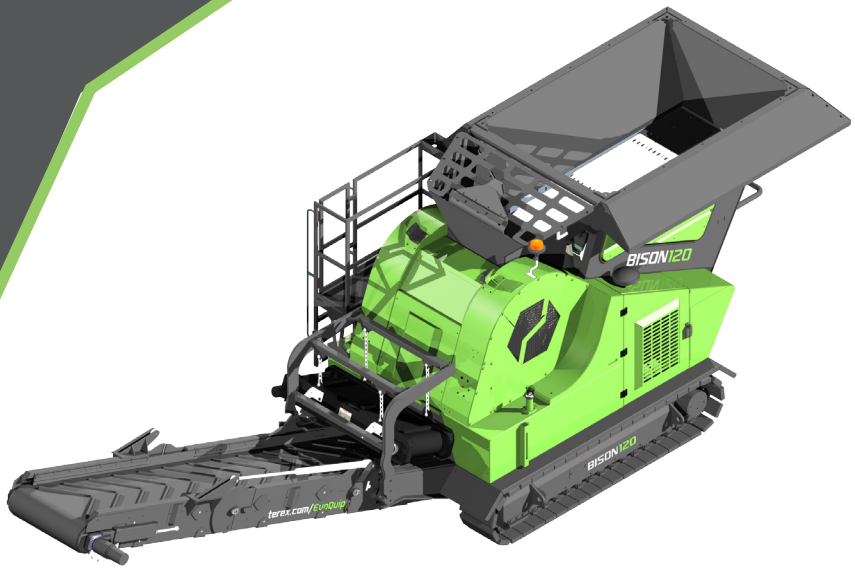


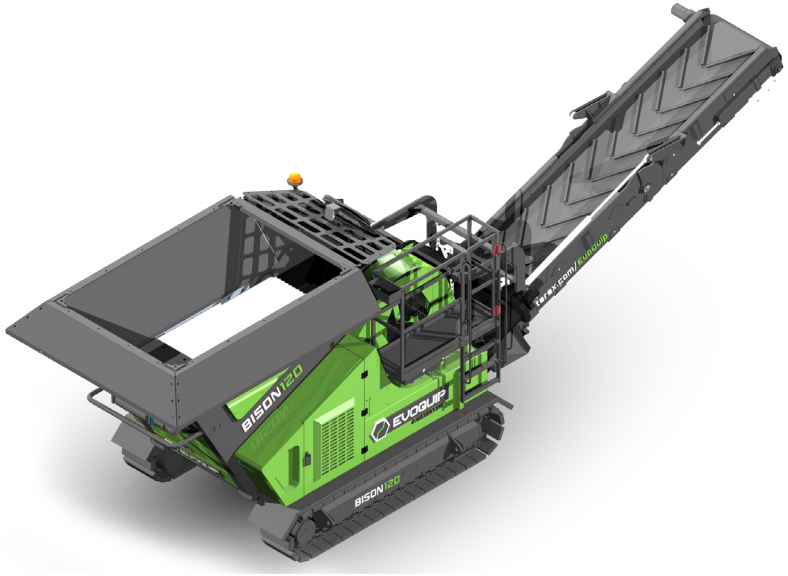

BISON 120

HOPPER / FEEDER

2.3m^3 (3yd^3) Hopper capacity

Grizzly feeder as standard

30mm (1-1/4") Nominal spacing grizzly

JAW CRUSHER

680mm x 400mm (27" x 16") Jaw Inlet

CSS Range: 20mm to 80mm (3/4" to 3-1/4")

Hydraulic Jaw adjustment

POWERUNIT

Tier 3: 61kW/ 83Hp engine

Tier 4 Final: Stage IIIB 52kW/70Hp Isuzu engine

Hydraulic drive of crusher

OUTPUT POTENIAL

Up to 80tph

CONVEYORS

800mm (32") Wide product conveyor

Product conveyor discharge height: 1800mm (6')

Hydraulic folding as standard for transport

GENERAL

Jaw level sensor as standard and remote control as standard

TRANSPORT

Transport dimensions

	LENGTH	WIDTH	HEIGHT
Track Unit	5.66m (18'7")	2.25m (7'5")	2.69m (8'10")

Weight: 13000Kgs (28660lbs)