TEREX®


Terex® Minerals Processing Systems
Cedarapids® CRH1313R

CRH1313R PORTABLE HSI/SCREEN PLANT




Features and Benefits


- Complete closed-circuit stand-alone plant sets up quickly with simple tools
- Cedarapids IP1313 impactor for high production; 50" (1270 mm) rotor, 3 or 4 bar
- Patent-pending dual slope 2-deck screen (17° top deck, 15° bottom deck) handles heavier loads
- Capability to return both screen deck products to crusher maximizes plant capacity
- Heavy-duty undercrusher pan feeder provides large discharge clearance and absorbs high velocity crusher discharge, preventing conveyor belt damage
- Hinged screen support structure hydraulically lowers to 13'5" (4090 mm) travel height and allows screen wire access at discharge end of screen
- Patent-pending hinged return chute, hinged magnet support, and bi-directional metal reject chute for quick (tool-less) setup of entire plant in one hour or less, no manual assembly or boom lifts required
- Large 48" x 16' (1219 x 4877 mm) high-stroke Cedarapids "Advantage" feeder with 60" (1524 mm) grizzly bar or optional stepped tine style grizzly section
- Powerful Tier 4, 450 hp (335 kW) diesel engine with hydraulic clutch split drive to crusher and generator
- 200 hp (150 kW) generator and removable electrical panel with all plant controls and two off-plant conveyor controls, plugs and receptacles provided
- Dual 24" (610 mm) reversible cross conveyors at screen discharge
- Optional quad axle suspension allows one-piece tow in states allowing 80000 lbs (36290 kg) on quad
- Optional hydraulic lift system allows easy removal of the feeder module from the plant without the use of a crane

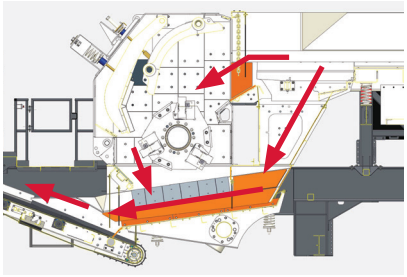

Undercrusher pan feeder absorbs high velocity material flow

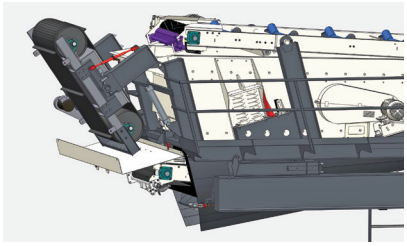

Optional magnet hydraulically folds for travel

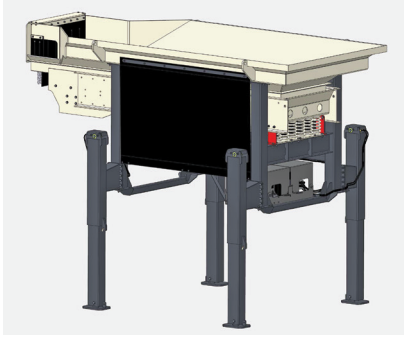

Optional feeder module lift system for easy transport

www.terexmps.com

Effective Date: March 2016. Product specifications and prices are subject to change without notice or obligation. The photographs and/or drawings in this document are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on the proper use of this equipment. Failure to follow the appropriate Operator's Manual when using our equipment or failure to act responsibly may result in serious injury or death. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and Terex makes no other warranty, express or implied. Terex, the Terex Crown design, Works For You, and Cedarapids are trademarks of Terex Corporation or its subsidiaries. All rights are reserved. © 2016 Terex Minerals Processing Systems.

Terex® Minerals Processing Systems, 909 17th Street NE, Cedar Rapids, IA 52402 USA
Tel +1 319 363 3511 ▪ Fax +1 319 399 4871 ▪ Email MPSsales@terex.com ▪ www.terexmps.com

Form 26561 (3/16)

WORKS FOR YOU.™